


Product data sheet

Heat-shrink tubing Shrink ratio 2:1 Series rolls highly flame-retardant

Item number: HS-H



Illustrations may be similar

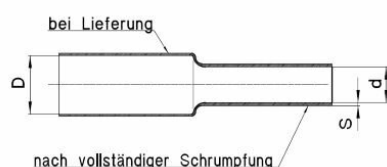

Material:	Cross-linked polyolefin
Color:	black
Dim. D inches:	4; 3/64; 1/16; 3/32; 1/8; 3/16; 1/4; 3/8; 1/2; 5/8; 3/4; 1; 1 1/2; 1 1/4; 2; 3
Ø before shrinkage / Ø after shrinkage:	1,2 mm / 0,6 mm; 1,6 mm / 0,8 mm; 2,4 mm / 1,2 mm; 3,2 mm / 1,6 mm; 4,8 mm / 2,4 mm; 6,4 mm / 3,2 mm; 9,5 mm / 4,8 mm; 12,7 mm / 6,4 mm; 16,0 mm / 8,0 mm; 19,1 mm / 9,5 mm; 25,4 mm / 12,7 mm; 31,8 mm / 15,9 mm; 50,8 mm / 25,4 mm; 101,6 mm / 50,8 mm; 38,1 mm / 19,1 mm; 76,2 mm / 38,1 mm
Wall thickness after complete shrinkage (mm):	0,40; 1,00; 0,48; 0,56; 0,62; 0,68; 0,87; 1,10; 1,20; 1,35
Min. shrink temperature:	70°C
Temperature for complete shrinkage:	100°C
Operating temperature:	-55°C bis + 135°C
Approval:	UL, CSA
RoHS III compliant:	Yes
Packaging unit in meters:	15; 50; 150; 75; 30

For individual advice, please feel free to contact us by email:

Subject to changes and errors.



Product link