


Product data sheet

Heat-shrink tubing Shrink ratio 2:1 Series rolls highly flame-retardant

Item number: HS064H




Illustrations may be similar

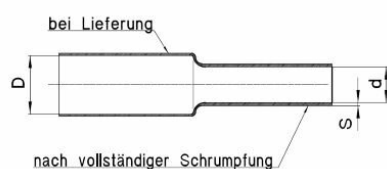

Material:	Cross-linked polyolefin
Color:	black
Dim. D inches:	1/4
Ø before shrinkage / Ø after shrinkage:	6,4 mm / 3,2 mm
Wall thickness after complete shrinkage (mm):	0,56
Min. shrink temperature:	70°C
Temperature for complete shrinkage:	100°C
Operating temperature:	-55°C bis + 135°C
Approval:	UL, CSA
RoHS III compliant:	Yes
Packaging unit in meters:	75

For individual advice, please feel free to contact us by email:

Subject to changes and errors.



Product link